


## HERITAGE - CAST IRON

Still a popular choice, Heritage Cast Iron pillars offer unrivalled longevity of service in a massively robust structure. Cast iron street furniture is increasingly being specified in urban areas to preserve architectural character and maintain the coveted listed status that certain sites enjoy.

Nine widths are offered in two different heights. The first two sizes, 22 and 30, are fitted with single left-hand opening doors whilst the remainder are double door equipped. Customers are able to choose special options from a list (see over) which includes doors fitted back and front and non standard colours.

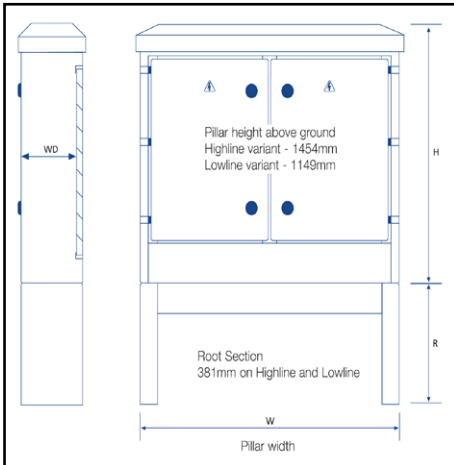


### Dimensions (mm)

Pillar size code	22	30	38	42	46	54	58	66	70
A Width of Pillar Roof (RW)	632	835	1045	1146	1248	1452	1553	1756	1858
B Ground Fixing Centres (Bolt on root only)	273	476	686	787	889	1092	1194	1397	1498
C Ground Fixing Centres (Shell only)	521	724	934	1035	1137	1340	1442	1645	1746
D Min. distances required to open door	435	486	452	503	554	655	706	808	895
E Internal Width	559	762	972	1073	1175	1378	1480	1683	1784
Backboard Width	483	686	896	997	1099	1302	1404	1607	1708
<b>Approx. Empty Weight (Kg)</b>									
Highline	240	280	315	332	360	398	415	440	460
Lowline	203	241	279	292	318	343	368	394	406

### Note

- Highline & Lowline dimensions A to D are common.
- Pillar sizes 22 & 30 single door hinged from left hand side.
- Internal working depth (WD) from backboard = 353mm. (461mm external depth)
- Backboard height: Highline = 1185mm Lowline = 880mm.

### The ordering code consists of 3 sections



### Pillar Height Above Ground (H)

Ref.	Complete as required
H	Highline H=1454mm
L	Lowline H=1149mm

### Pillar Width (Body) (W)

Ref.	Complete as required
22	582mm
30	785mm
38	995mm
42	1096mm
46	1198mm
54	1402mm
58	1503mm
66	1706mm
70	1808mm

### Options

Ref.	Complete as required
A	Green Colour
B	In fill panel for root section
C	Bar Lock
D	Yale Lock
F	Alternative Paint Colour
G	Heater Kit
H	13 Amp Socket Kit
I	Lighting Kit
S	If "S" Special requirement is selected, a full description with diagrams and specification must be provided

### SPECIFICATION

Pillar cap and sides cast in close grain grey iron to BS 1452, grade 180

All pillar components receive a zinc phosphate resin treatment followed by a final coat of polyurethane paint in dark Admiralty grey (RAL 7012) or Hollybush green (RAL 6028)

Doors and back panels are fabricated from 4mm nominal thickness special chrome enriched steel

Two wedge locks with security covers

Sets of zinc pre-coated steel in-fill panels available for fitting to root when mounted above ground

Doors can be fitted back and front if required with a centre mounted backboard offering dual entry/security i.e. for REC and Local Authority access

15mm marine ply backboard standard fitment

IP3L3 rating

Removable doors with latching stays

Anti-condensation vented cap

Lifting lugs (for lifting non-equipped cabinets only)

### OPTIONS

In-fill/apron plate

Yale lock or bar lock

Alternative paint finishes to British Standards

Interior light, heater with thermostat

Pre-equipped backboard according to Customer specification with factory test certificate

G2A Highways Agency paint specification