


FORTRESS - SINGLE DOOR

The Fortress Single Door pillars are available in 6 sizes in both mild and stainless steel. Mild steel variants can be obtained in two panel thicknesses with a choice of a hot dip galvanised finish or hot dip galvanising followed by paint.


When ordering stainless steel versions, the Customer is free to specify the grade and finish required. Further options can be selected from the list overleaf and should be specified at the time of order.

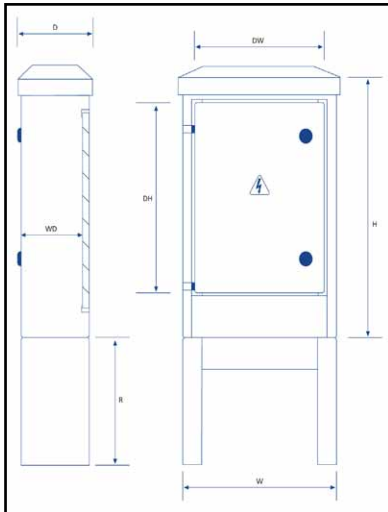

Dimensions (mm)

Pillar size code	05	06	08	09	10	12
Height (H) above ground	791	636	836	1088	1194	1294
Root Section (R)	350	300	300	350	350	350
Width (W)	310	400	600	661	800	1100
Depth (D)	220	180	250	281	350	400
Door Opening Height (DH)	585	410	610	860	907	1007
Door Opening Width (DW)	200	300	500	550	700	1000
Working Depth (WD)	170	155	225	225	325	375
Backboard Size (WxH)	650x300	390x475	590x675	640x930	790x975	1080x1075
Weight (Kg) (3mm thickness)	36	42.5	71.5	84	108	142

The ordering code consists of 4 sections

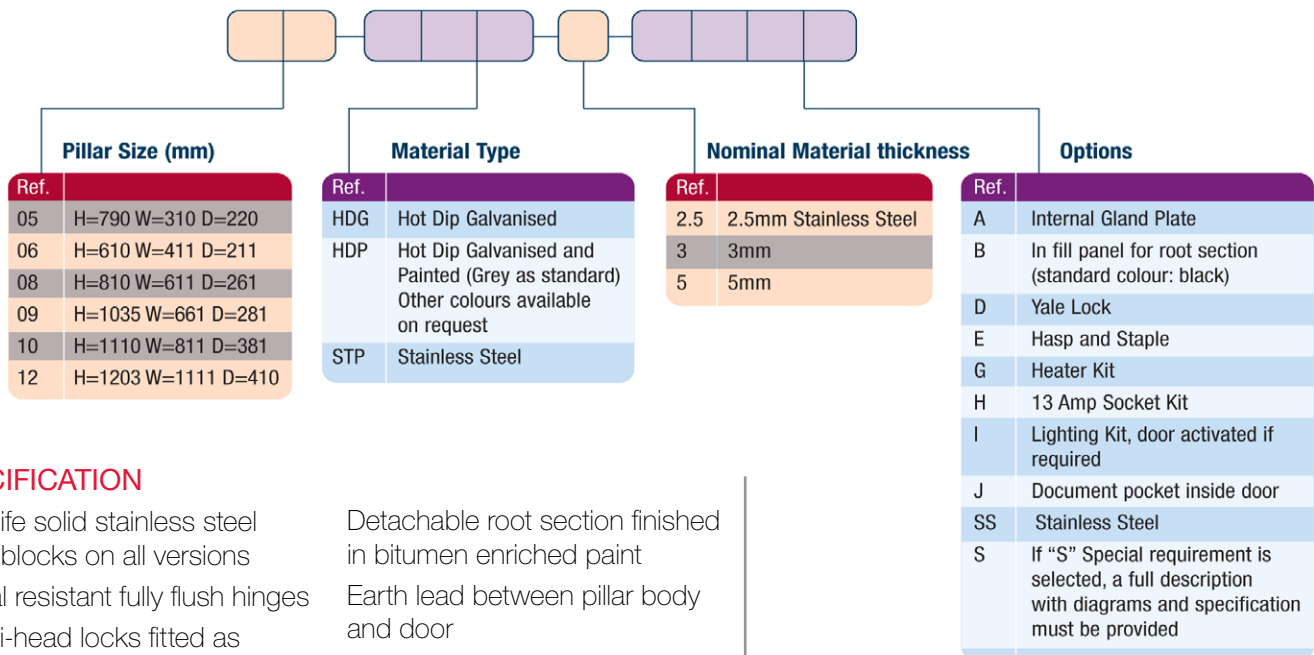

SPECIFICATION

Long life solid stainless steel hinge blocks on all versions
 Vandal resistant fully flush hinges
 Two tri-head locks fitted as standard
 Backboard made from 18mm treated exterior grade plywood
 Detachable roof
 'Danger' warning label fitted in door recess

Detachable root section finished in bitumen enriched paint
 Earth lead between pillar body and door
 High quality UV resistant paint to an average thickness of 60 microns
 Door seal to IP65

Anti vandal lock available
 (See Feeder Pillar Accessory page)

OPTIONS

Customer specification pre-wired solutions available
 Other colours / labels available to special order
 Optional G2A Highways Agency paint specification