


SLIMLINE


This latest addition to the family of pillars is based on a modular format where the cabinet width increases in increments of 100 or 150mm. Six popular sizes are offered with the same material and paint choices as the Fortress pillars. Alternative specification products can be obtained either from the list below or via the Sales Department if a bespoke item is required.

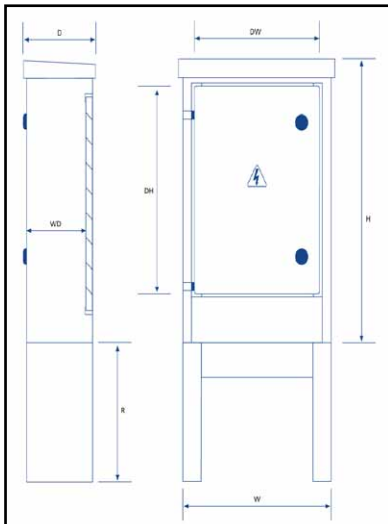

Dimensions (mm)

Pillar size code	SL01	SL02	SL03	SL04	SL05	SL06
Height (H) above ground	800	950	1093	1100	1150	1150
Root Section (R)	300	300	300	300	300	300
Width (W)	250	350	450	550	650	800
Depth (D)	160	235	260	275	300	325
Door Opening Height (DH)	590	740	740	840	940	940
Door Opening Width (DW)	149	249	349	449	549	699
Working Depth (WD)	106	181	206	221	246	271
Backboard Size (WxH)	240x765	340x915	440x915	540x1015	640x1115	790x1115

The ordering code consists of 4 sections



Pillar Size (mm)

Ref.	Dimensions
SL01	800x250x160
SL02	950x350x235
SL03	1093x450x260
SL04	1100x550x275
SL05	1150x650x300
SL06	1150x800x325

Material Type

Ref.	Description
HDG	Hot Dip Galvanised
HDP	Hot Dip Galvanised and Painted (Grey as standard) Other colours available on request
STP	Stainless Steel

Nominal Material thickness

Ref.	Thickness
3	3mm

Options

Ref.	Description
D	Yale Lock
E	Hasp and Staple
G	Heater Kit
H	13 Amp Socket Kit
I	Lighting Kit, door activated if required
J	Document pocket inside door
SS	Stainless Steel
S	If "S" Special requirement is selected, a full description with diagrams and specification must be provided

Anti vandal lock available

SPECIFICATION

Long life solid stainless steel hinge blocks on all versions
Vandal resistant fully flush hinges
Two tri-head locks or Owedge locks fitted as standard
Backboard made from 18mm treated exterior grade plywood
'Danger' warning label fitted in door recess

Detachable root section finished in bitumen enriched paint
Earth lead between pillar body and door
High quality UV resistant paint to an average thickness of 60 microns
Door seal to IP65
Ground level marked

OPTIONS

Customer specification pre-wired solutions available
Other colours / labels available to special order
Optional G2A Highways Agency paint specification